




OneTouch™ Motorised Hard Wired AC Motor - for 35/40/45mm tube with remotes

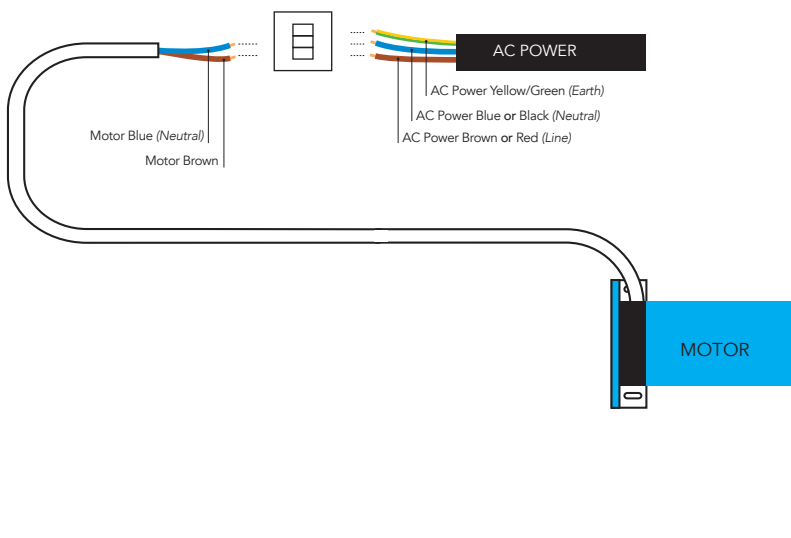

Motor size

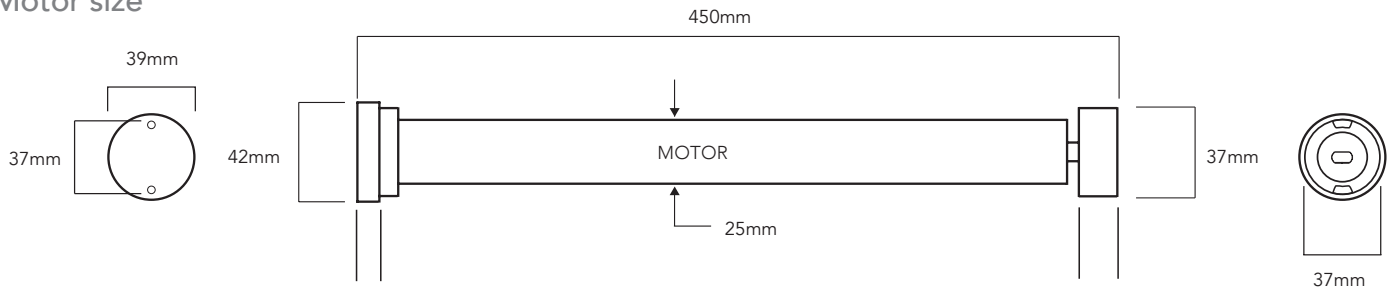

Parameters			
Rated torque	1.5Nm	Rated Current	0.13A
Rated RPM	32 rpm	IP Class	IP44
Motor Diameter	25mm	Cable	2 core
Rated Voltage	DC110/230V	Inbuilt Receiver	Yes
Rated Power	15.3W		

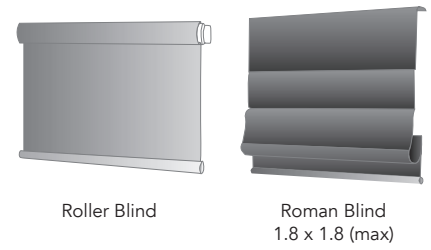

Maxium recommended holding weight using Ex-Lite® fabric

		Width (m)													
		0.5	0.8	1	1.2	1.4	1.6	1.8	2	2.2	2.4	2.6	2.8	3	
Drop (m)	0.5	•	•	•	•	•	•	•	•	•	•	•	•	•	
	0.8	•	•	•	•	•	•	•	•	•	•	•	•	•	
	1.1	•	•	•	•	•	•	•	•	•	•	•	•	•	
	1.4	•	•	•	•	•	•	•	•	•	•	•	•	•	
	1.7	•	•	•	•	•	•	•	•	•	•	•	•	•	
	2	•	•	•	•	•	•	•	•	•	•	•	•	•	
	2.3	•	•	•	•	•	•	•	•	•	•	•	•	•	
	2.6	•	•	•	•	•	•	•	•	•	•	•	•	•	
	2.9	•	•	•	•	•	•	•	•	•	•	•	•	•	
	3.2	•	•	•	•	•	•	•	•	•	•	•	•	•	
	3.5	•	•	•	•	•	•	•	•	•	•	•	•	•	

Please also refer to the Louvolite maximum fabric drop chart.

Features

- Electronic Limits
- Internal receiver
- Weight Capacity 5kgs
- Operated by R.F. remotes
- Minimum blind width 500mm
- Tube deductions 35mm*

Parameters	
Material	Ex-Lite®
	35
	40
	45

Components for OneTouch™ Motorised Hard Wired AC Motor - for 35/40/45mm tube with remotes

